

HIPPOCENTER

2018 - 2019

SINCE 2008



Leader in France



Large range



Made in Normandy



Budget

(0033) 6 50 05 97 15- contact@hippocenter.fr

www.hippocenter.com

OUR VALUES

OUR HISTORY

Hippocenter company was created in 2008 with the aim of supplying high-performance equipment meeting the requirements of all protagonists of the horse world.

Our team consists of horse lovers who are committed to their passion. Our organisation is established in Normandy.

During its first years of activity, Hippocenter distributed products manufactured throughout Europe, mainly Scandinavia.

Noticing that this supply did not meet our customers' expectations perfectly, we took the decision to design our own range.

We are now proud to manufacture over 90% of the products we sell.

We currently supply a range in line with our customers' requirements, at the right price.



OUR PRODUCTION TOOL

The Hippocenter factory is situated in Normandy, 5 km from Bayeux and 20 minutes from Caen.

Growing year after year, our production facility meets the standards of the agricultural sector.

Comprising numerous top quality devices and equipment, it enables us to manufacture and maintain our products in an optimum manner.

Our workers and engineers have manufacturing, storage and testing areas where the reliability of our machines can be confirmed.

We would be delighted to share our trade with you – do please contact us for a visit to our premises.

CONTENTS

Treadmills	4
Walker Mechanism	12
Walker Fences	14
Covored Walkers	17
Walkers	26
Open Lunge Rings	27
Covered Lunge Rings	29
Suspended Horse Walkers	38
Options Lunge Rings	39
Horse Weighing Scales	40
Horse Solarium	41
Hippotraining	42
Track Harrow Hippotrack	43
Horse Crush	44
Fence Hippofence	45

TREADMILL HIPPOTRAINER

HIPPOTRAINER

Adjustable speed from 0 to 10 km/h
Can be inclined up to 10%
10 set programmes



Funding



Warranty



Installation



Technical assistance

The Hippotrainer treadmill is the most popular treadmill. Capable of reaching a speed of 10 km/h, it can train your horses at the walk, with or without gradient. With 10 programmes, this treadmill offers different exercises designed to meet the requirements of your horse. Working on a slope gives the possibility of rapid muscle development, and this is why the Hippotrainer is fitted with jacks enabling it to be raised up to 10%.

Available from €10,600 excluding VAT, it is available with transparent walls in the Hippotrainer + version.

French design, manufactured in Normandy.

Technical characteristics

Continuous speed regulator from 0 to 10 km/h

10 programs (regeneration, warm-up, recuperation, muscle-building)

Incline adjustable and epoxy coated

Safety photocell (anti-panic)

High-strength, shock absorbing rubber matting.

Training : 5kW conical torque motor 380V 16A

Prices

Contact us

Dimensions

Length : **3.5m**

Width : **1.46m**

Weight : **900 kg**

Options

220V power supply

Box to take payment tokens

Access ramp

Personalised paint

Personalised program

(Pro Trainer)



TREADMILL HIPPOTRAINER +

HIPPOTRAINER +

Adjustable speed from 0 to 10 km/h
Can be inclined up to 10%
10 set programmes



Funding



Warranty



Installation



Technical assistance

The Hippotrainer + treadmill is the most popular treadmill. Capable of reaching a speed of 10 km/h, it can train your horses at the walk, with or without gradient. With 10 programmes, this treadmill offers different exercises designed to meet the requirements of your horse. Working on a slope gives the possibility of rapid muscle development, and this is why the Hippotrainer is fitted with jacks enabling it to be raised up to 10%.

Available in the Hippotrainer version from €10,600 excluding VAT, the price of the Hippotrainer + starts at €12,645 excluding VAT.

French design, manufactured in Normandy.

Technical characteristics

Continuous speed regulator from 0 to 10 km/h

10 programs (regeneration, warm-up, recuperation, muscle-building)

Incline adjustable and epoxy coated

Safety photocell (anti-panic)

High-strength, shock absorbing rubber matting.

Training : 5kW conical torque motor 380V 16A

Translucent walls in anti-split Makrolon

Prices

Contact us

Dimensions

Length : **3.5m**

Width : **1.46m**

Weight : **900 kg**

Options

220V power supply

Box to take payment tokens

Access ramp

Personalised paint

Personalised program

(Pro Trainer)



TREADMILL PROTRAINER

PROTRAINER

Adjustable speed from 0 to 15 km/h
(40 if trot option)
Can be inclined up to 10%
10 set programmes
100 customised programmes



Funding



Warranty



Installation



Technical assistance

The Protrainer treadmill is at the very top of the range available on the market. Its galvanised steel construction ensures durability and toughness under all conditions. The Protrainer reaches a speed of 15 km/h in the classic version and 40 km/h in the trot/canter version. This treadmill contains 10 set programmes and also offers the possibility of creating up to 100 customised programmes. Gradient from 0 to 10%.

French design, manufactured in Normandy.

Technical characteristics

Continuous speed regulator from 0 to 15 km/h

To 100 programs recordable at the horse name

Incline adjustable to 10%

Inclinisation : single motor with hydraulic pump and 40cm stroke cylinder

Safety photocell (anti-panic)

Tactile control panel

Lubrication system, making rubber mating's life longer

Prices

Contact us

Dimensions

Length : **6,65 m**

Width : **1.49 m**

Height : **2.40 m**

Weight : **1700 kg**

Options

220V power supply

Box to take payment tokens

Access ramp

Personalised paint

Personalised program

(Pro Trainer)

PROTRAINER BASIQUE

Protrainer Basique

As for Protrainer except :

Speed control from **0 to 12 km/h**

Absence of side step

Mechanical control box

Control panel located at the tail bar

PROTRAINER TROT

Protrainer trot

Speed control from **0 to 40 km/h**



HIPPOCENTER WATER TREADMILL



Funding : possible financing



Warranty



Installation



Technical assistance

Hippocenter Water treadmill is probably the most effective balneotherapy machine on the market. The water allows to perform a background work and adapt the training to the needs and pathology of the horses. The water treadmill reduces the supported weight from 40% to 60% and this decreases the healing time by up to 50%.

Manufactured in our Normandy factories, this machine is equipped with a touch screen to make your own programs (up to 100).

Incline adjustable to 10%, this treadmill work with and without water.

French design, manufactured in Normandy.

Characteristic

- 10 set programmes
- 100 customised programmes
- Soft floor
- Display speed and programs on the tactile control panel
- Adjustable speed from 0 to 11km/h
- Complete stainless steel structure
- Emergency stop buttons
- Incline adjustable to 10%

Dimensions

- Length : **4,20 m**
- Width : **1,63 m**

Price

Water Treadmill **Please contact us**

NEW GENERATION SPA



NEW GENERATION SPA

Inspection bench
Structure in stainless steel
Water cooling from 2 to 5 °c



Funding : possible financing



Warranty



Installation



Technical Assistance

New generation SPA from Hippocenter helps to improve blood circulation and optimize recovery. Saltwater in the SPA can be cooled down to 2°C and have an important role in the healing. Case studies have proved that cold water spa treatment is extremely beneficial to any leg injuries.

Manufactured in our Normandy factory this machine is equipped with a touch screen and is built in stainless steel.

French design, manufactured in Normandy.


Characteristic

- Inspection bench
- Adjustable water level
- Diaper
- Floor with holes to create swirles
- Display of programming and temperature on a touch screen
- Structure in stainless steel
- Emergency stop buttom
- Water cooling from 2 to 5 °c

Price

SPA.....**Please contact us**

WALKER MECHANISM

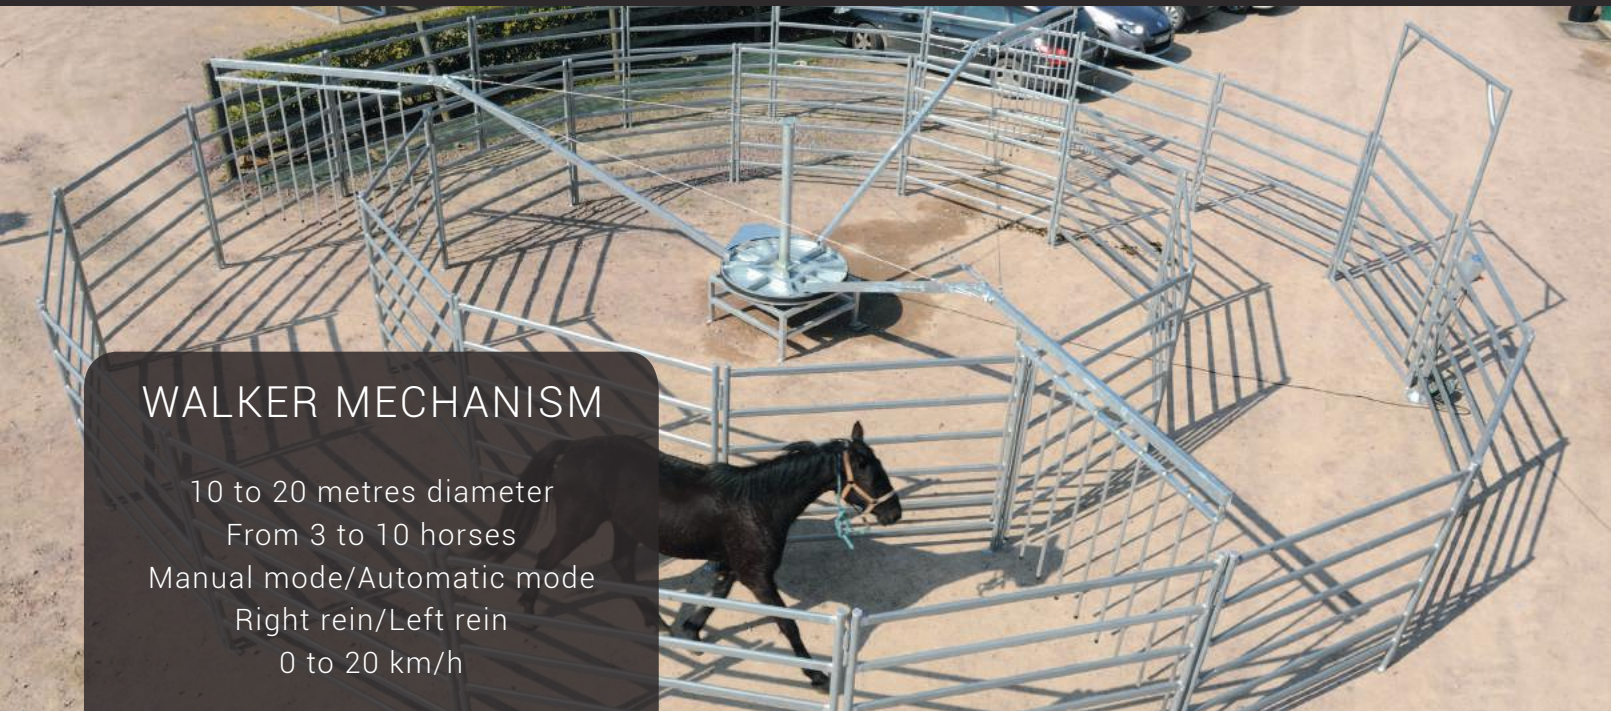

WALKER MECHANISM

10 to 20 metres diameter
 From 3 to 10 horses
 Manual mode/Automatic mode
 Right rein/Left rein
 0 to 20 km/h



Funding



Warranty



Installation



Technical assistance

Our walker mechanism has been developed to meet your requirements. Simple to use, it includes a set programme for changing direction automatically every 10 minutes. Capable of reaching a speed of 20 km/h, it offers the possibility of working at the walk and trot. With 100% galvanised steel construction, it withstands the passage of time perfectly. This horse walker mechanism goes perfectly with our covered walkers and our uncovered walkers.

French design, manufactured in Normandy.

NB horses	10 m	12 m	15 m	16 m	18 m	20 m
3 horses	contact us	contact us	-	-	-	-
4 horses	contact us	contact us	contact us	contact us	contact us	contact us
6 horses	-	contact us	contact us	contact us	contact us	contact us
8 horses	-	-	-	contact us	contact us	contact us

Motorisation LENZE - Electric fences GALLAGHER

Including : Standard partition, motor, arm, electrification, computer and program.

SUSPENDED WALKERS

(voir page 36)

PARTITIONS

STANDARD PARTITION

Sold with our mechanisms,
composed of 10 electrified aluminium tubes
= **included in the mechanism price**



TUBES + RUBBER PARTITION

10 electrified aluminium tubes + Beo Band rubber masking strips.
= **contact us**



1/2 GRID + 1/2 RUBBER

1/2 grid + electrified rubber skirt
= **contact us**



1/3 GRID + 2/3 RUBBER PARTITION

1/3 grid + rubber skirt with electrified chains
= **contact us**



COMPLETE RUBBER PARTITION

Rubber panel + electrified chains
= **contact us**



We offer a range of partition types in order to adapt your mechanism to suit the nature of your horses

WALKER ENCLOSURES



BEO-BAND / SCANDINAVIAN WOOD WALKER FENCES

10 to 20 metres in diameter
Autoclaved wooden posts
Beo-band rubber or half-round wooden rails
Fixings and entrance gate included



Funding



Warranty



Installation



Technical assistance

BEO BAND ENCLOSURE WITH 2 RAILS

10 m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

SWEDISH BARRIER WITH 2 RAILS

10 m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

BEO BAND ENCLOSURE WITH 3 RAILS

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

SWEDISH BARRIER WITH 3 RAILS

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

BOARD OF TRACK

1 additional board to keep the sand on the track

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

BOARD OF TRACK

1 additional board to keep the sand on the track

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

AUSTRALIA FENCES



AUSTRALIA FENCES

10 to 20 metres in diameter
Galvanised steel
Fixings and entrance gate included



Funding



Warranty



Installation



Technical assistance

HEIGHT 1,80 M

10m external / 5m internal
12m external / 7m internal
15m external / 10m internal
16m external / 11m internal
18m external / 13m internal
20m external / 15m internal
**Door and fixations included*

BOARDS OF TRACK (LOOSE)

1 additional board to keep the sand on the track
10m
12m
15m
16m
18m
20m


Possibility of fixing the optional boards

COVER RUBBER AND GROUNDS

(see page 24)



GRAND-PRIX AND PRESTIGE FENCES

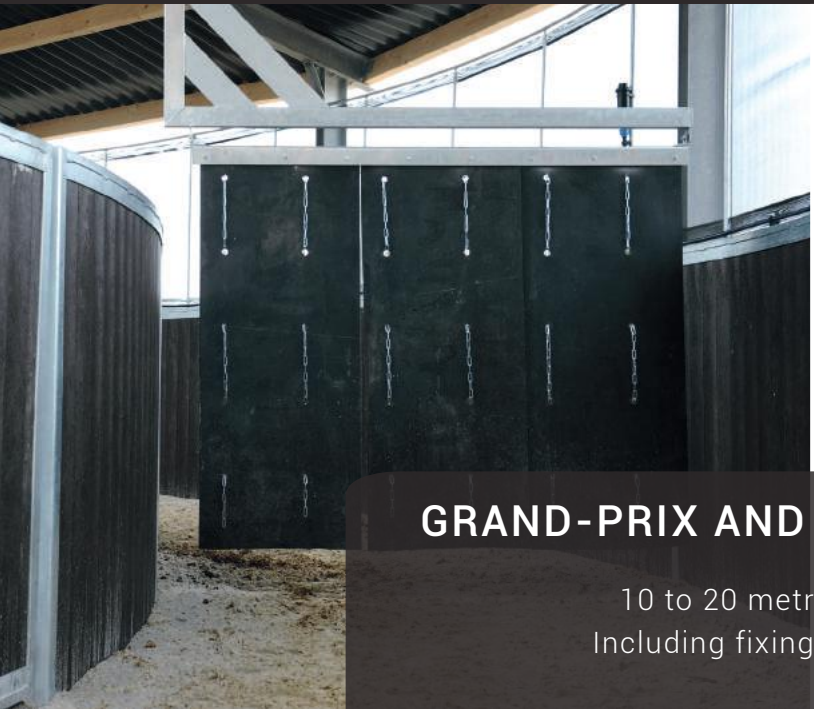

GRAND-PRIX AND PRESTIGE FENCES

10 to 20 metres in diameter
Including fixings and front door



Funding



Warranty



Installation



Technical assistance

GRAND-PRIX FENCES

Round safety enclosure with 45mm
class IV autoclaved wood

Height 1 350 mm

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

Height 1 575 mm

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

OPTIONS

Luxe (rounded walls)

PRESTIGE FENCES

Composite enclosure in 32mm
PVC rotproof resin

Height 1 350 mm

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

Height 1 575 mm

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

COVER RUBBER AND GROUNDS

(see page 24)

SEMI-COVERED WALKERS

PROFESSIONNAL

- Removable model*
- Galvanized structure*
- Roofing tarpaulin plasticized high resistance*
- Marine treated wood fence (19 mm thick)*



BASIQUE

- IPE steel structure*
- Stabipol polyester roof, 5m wide*
- Closing of your choice*




CONFORT

- IPE steel structure*
- Stabipol polyester roof, 5m wide*
- Fence included autoclave wood (45mm)*



PRESTIGE

- IPE steel structure*
- Stabipol polyester roof, 5m wide*
- Fence included rot-proof PVC (32mm)*

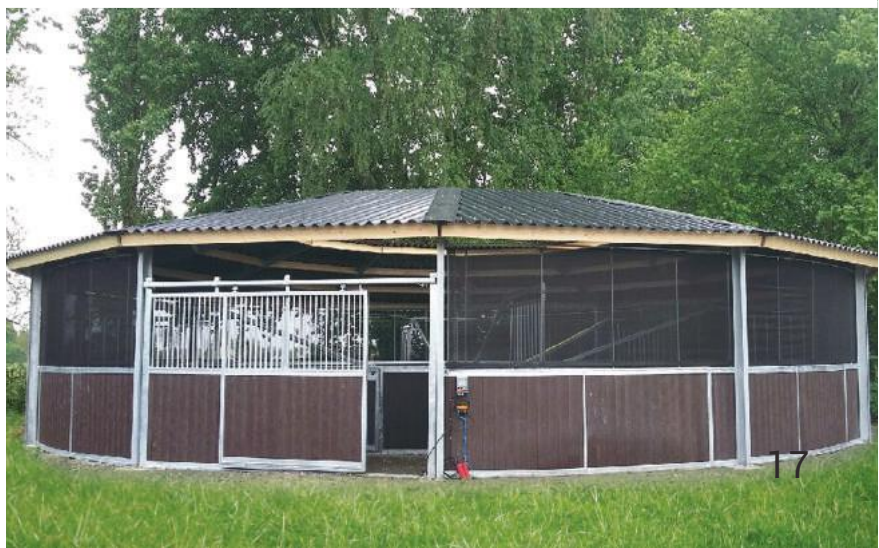

HORSE WALKER PROFESSIONAL



HORSE WALKER PROFESSIONAL

12 to 20 metres in diameter
Dismantlable structure
Galvanised steel



Funding



Warranty



Installation



Technical assistance

The professional walker is very popular with stable yards that want a top-of-the-range walker which is easy to erect on their land. The professional walker does not need concrete foundations. Its galvanised steel structure is anchored directly into stabilised ground using cast iron posts. Its Bakelite fence withstands perfectly the passage of time and kicks from your horses. With a high-density tarpaulin roof, this horse walker will fully meet your expectations while offering excellent value for money. Our walker mechanisms go perfectly with this roof.

French design, manufactured in Normandy.

Technical characteristics

Complete structure in hot-dipped galvanised steel

Roof in laminated high-resistant tarpaulin (in white, cream or green)

Galvanised steel beams

Corridor enclosure with rounded, galvanised frames and marine-treated wood (19 mm)

Floor anchor points

Hinged access door

Prices

12m
15m
16m
17,6m
19,2m

Options :

Windbreak netting
(white, cream or green coloured)

12m
15m
16m
17,6m
19,2m

FLOOR-LEVEL ENCLOSURED

12m
15m
16m
17,6m
19,2m

COVER RUBBER AND GROUNDS

(see page 24)



HORSE WALKER BASIQUE



Funding



Warranty



Installation



Technical assistance

The basic horse walker is constructed using heavy materials typically used for agricultural buildings. Its IPE steel structure ensures durability and toughness under all conditions. The Stabipol roof reduces noise due to bad weather, withstands the passage of time better than simple steel sheeting and will protect your walking track perfectly thanks to its 5-metre width. With the basic version you only have the roof, so you can add your fence yourself or choose one of our models from among our different versions for an uncovered walker. Our walker mechanisms go perfectly with this roof.

French design, manufactured in Normandy.

Technical characteristics

IPE galvanised

Stabipol reinforced polyester roofing, corrugated boards

Wood beams 58 X 156 mm

Prices

10m
12m
15m
16m
18m
20m

Options :

Gateway
(Sliding or beating - 4 m)

Covered entrance

Windbreak netting (straight) – height 1,25m

10m
12m
15m
16m
18m
20m

Windbreak netting (straight) – height 2,50m

10m
12m
15m
16m
18m
20m

Windbreak netting Luxe (round) - height 1,25m

10m
12m
15m
16m
18m
20m



HORSE WALKER CONFORT



HORSE WALKER CONFORT

10 to 20 metres in diameter
IPE steel post structure
5-metre wide roof
45 mm autoclaved wood fencing



Funding



Warranty



Installation



Technical assistance

The Comfort horse walker is constructed using heavy materials typically used for agricultural buildings. Its IPE steel structure ensures durability and toughness under all conditions. Its Stabipol roof offers several advantages. It reduces noise due to bad weather, withstands the passage of time better than simple steel sheeting and protects your walking track perfectly thanks to its 5-metre width. The Comfort walker fencing consists of 45 mm thick class 4 treated autoclaved wood planks. This top quality wood is very popular with stable yards as it provides excellent resistance to impact and requires little maintenance. If you would like a plastic fence, the Prestige version walker is made for you. Our walker mechanisms go perfectly with this roof.

French design, manufactured in Normandy.

Technical characteristics

IPE galvanised

Stabipol reinforced polyester roofing, corrugated boards

Wood beams 58x156mm

External corridor enclosure Grand Prix

Prices

10m
12m
15m
16m
18m
20m

Options :

Extra-high walls 1.6m

Covered entrance

Option Luxe

Rounded vertical boarding

Windbreak netting (straight) – height 1,25m


10m
12m
15m
16m
18m
20m

Windbreak netting Luxe (round) - height 1,25m


10m
12m
15m
16m
18m
20m

COVER RUBBER AND GROUNDS

(see page 24)

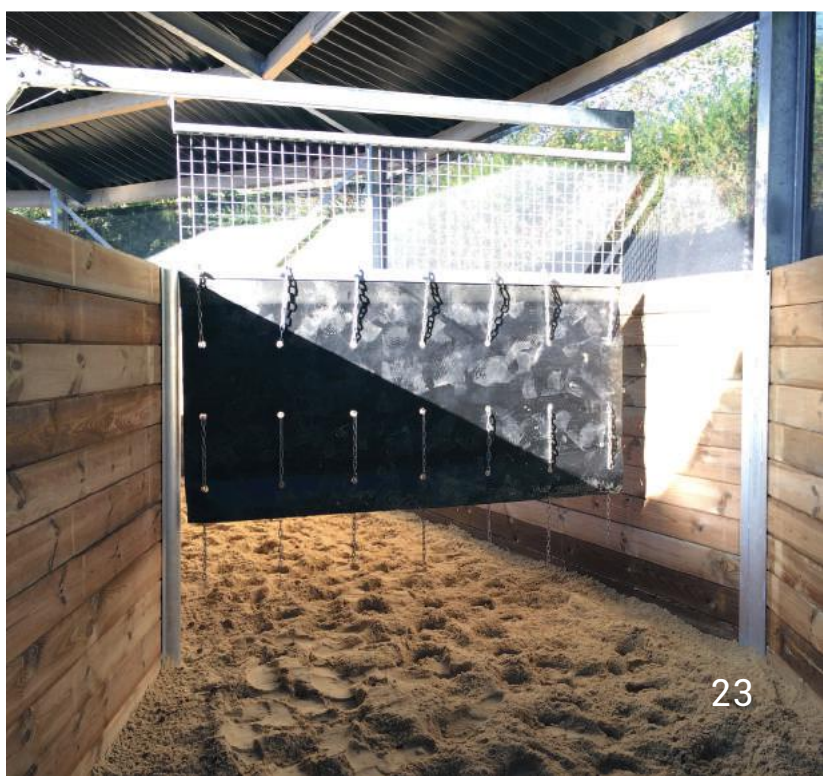

HORSE WALKER PRESTIGE

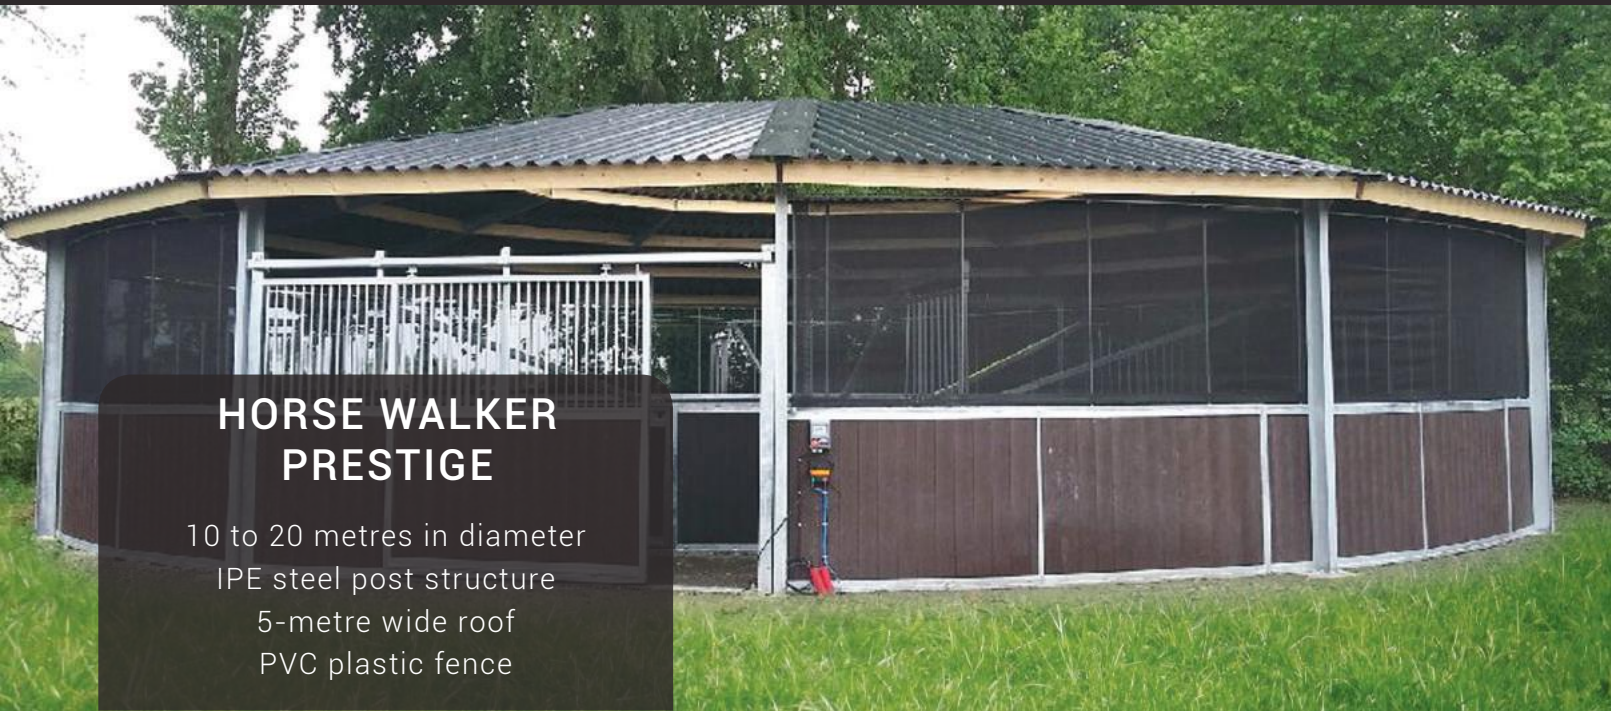

HORSE WALKER PRESTIGE

10 to 20 metres in diameter
IPE steel post structure
5-metre wide roof
PVC plastic fence



Funding



Warranty



Installation



Technical assistance

The Prestige version horse walker is constructed using heavy materials typically used for agricultural buildings. Its IPE steel structure ensures durability and toughness under all conditions. Its Stabipol roof offers several advantages. It reduces noise due to bad weather, withstands the passage of time better than simple steel sheeting and protects your walking track perfectly thanks to its 5-metre width. The Prestige walker fence consists of PVC plastic planks mounted in a galvanised frame. The main advantage of plastic is that it needs no maintenance. Different colours are available, and some shades are like natural wood. Our walker mechanisms go perfectly with this roof.

French design, manufactured in Normandy.

Technical characteristics

IPE galvanised

Stabipol reinforced polyester roofing, corrugated boards

Wood beams 58x156mm

Windbreak netting

Corridor enclosure Luxe with rounded galvanised frames and high-resistant plastic panelling

Colour - dark wood

Choice of hinged or sliding access door

Prices

10m
12m
15m
16m
18m
20m

Options :

Extra-high walls 1.6m

Covered entrance

COVER RUBBER AND GROUNDS

(see page 24)



Price excluding Mechanism

OPTIONS WALKERS

SIDE WALLS

Beo Band

Height 1500 mm - Depth : 14 and 20 mm

10m

12m

15m

16m

18m

20m



WALKER FLOORS

Butyflex

Big Bag 700 kg

10m

12m

15m

16m

18m

20m



HIPPOTRACK FLOORS

10m - 65 m²

12m - 82 m²

14m - 99 m²

15m - 108 m²

16m - 117 m²

18m - 134 m²

20m - 151 m²

22m - 168 m²



OPEN LUNGE RINGS



HORSE LUNGE RING SWEDISH BARRIER AND BEO BAND

10 to 20 metres in diameter
Autoclaved wood posts
Beo-band rubber or half-round wood rails
Fixings and entrance gate included



Funding



Warranty



Installation



Technical assistance

2 RAILS

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

3 RAILS

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

BOARD OF TRACK

1 additional board to keep the sand on the track

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

SWEDISH BARRIER 2 RAILS

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

SWEDISH BARRIER 3 RAILS

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

BOARD OF TRACK

1 additional board to keep the sand on the track

10m

Exists in 12m, 15m, 16m, 18m et 20m

Prices : contact us

OPEN LUNGE RINGS



HORSE LUNGE RING AUSTRALIA

10 to 20 metres in diameter
Galvanised steel
Fixings and entrance gate included



Funding



Warranty



Installation



Technical assistance

Prices

10m
12m
15m
16m
18m
20m

Options :

Width of access door adaptable for panel (30kg) length 2m15 x height 2m75

Autoclave treated boarding in place of the galvanised tubes

Additional board to keep the sand on the track

Cover rubber and grounds (see page 24)



COVERED LUNGE RINGS

PROFESSIONNAL

- Removable model*
- Galvanized structure*
- Roofing tarpaulin plasticized high resistance*
- Marine treated wood fence (19 mm thick)*



BASIC

- IPE steel structure*
- Stabipol polyester roof*
- Closing of your choice*



CONFORT

- IPE steel structure*
- Stabipol polyester roof*
- Fence included autoclave wood (45mm)*



PRESTIGE

- IPE steel structure*
- Stabipol polyester roof*
- Fence included rot-proof PVC (32mm)*



PROFESSIONAL LUNGING RING

PROFESSIONAL LUNGING RING

13 to 20 metres in diameter
Dismantlable structure
Galvanised steel



Funding



Warranty



Installation



Technical assistance

The professional lunging ring is very popular with stable yards that want a top-of-the-range covered arena which is easy to erect on their land. The professional lunging ring does not need concrete foundations. Its galvanised steel structure is anchored directly into stabilised ground using cast iron posts. Its Bakelite fence withstands perfectly the passage of time and kicks from your horses. With a high-density tarpaulin roof, this horse lunging ring will fully meet your expectations while offering excellent value for money.

French design, manufactured in Normandy.

Technical characteristics

IPE galvanised

Enclosure in 19mm marine ply

Galvanised steel beams (can take up to 100kg/m² of snow)

Roof in laminated high-resistant tarpaulin (in white, cream or green)

Floor anchor points

Access door

Prices

13,2m
15m
16,6m
18,3m
19,9m

Options :

WINDBREAK NETTING

(white, cream or green)

12m
15m
16m
17,6m
19,2m


FLOOR-LEVEL ENCLOSURE

12m
15m
16m
17,6m
19,2m

COVER RUBBER AND GROUNDS

(see page 24)

Price excluding Mechanism

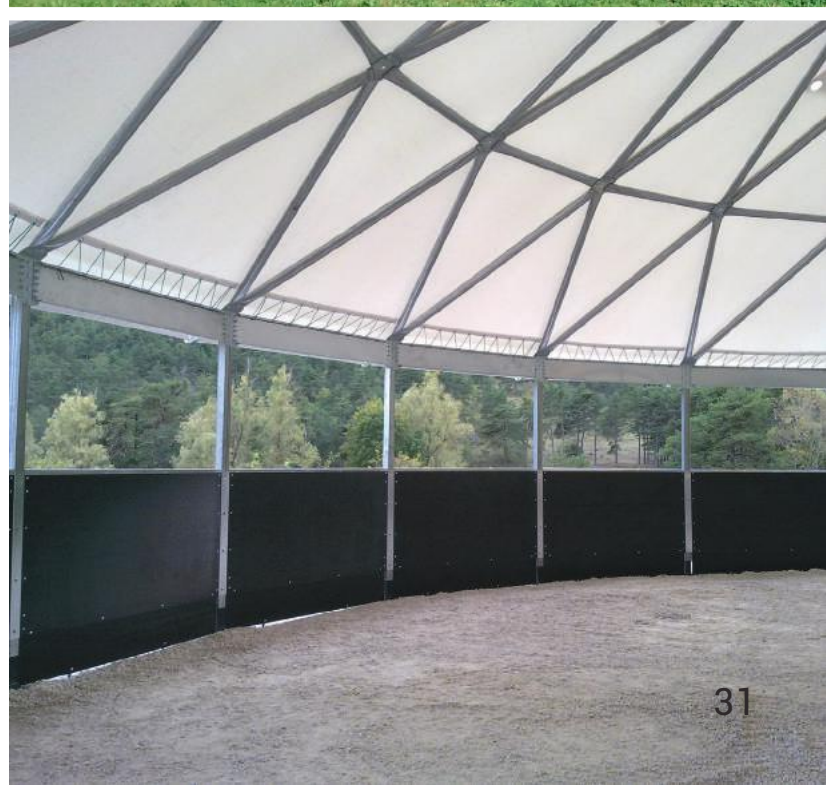

BASIC LUNGING RING



BASIC LUNGING RING

10 to 20 metres in diameter
IPE steel post structure
Reinforced Stabipol roof



Funding



Warranty



Installation



Technical assistance

The basic horse lungeing ring is constructed using heavy materials typically used for agricultural buildings. Its IPE steel structure ensures durability and toughness under all conditions. The Stabipol roof reduces noise due to bad weather and withstands the passage of time better than simple steel sheeting. With the basic version you only have the roof, so you can add your fence yourself or choose one of our models from among our different versions for an uncovered lungeing ring. Our suspended walker mechanisms go perfectly with this roof.

French design, manufactured in Normandy.

Technical characteristics

IPE galvanised
Stabipol reinforced polyester roofing
Wood beams 58x156mm

Prices

10m
12m
15m
16m
18m
20m

Options :

Covered entrance

Windbreak netting (straight) – height 1,25m

10m
12m
15m
16m
18m
20m

Windbreak netting (straight) – height 2,50m

10m
12m
15m
16m
18m
20m



COMFORT LUNGING RING

COMFORT LUNGING RING

10 to 20 metres in diameter
IPE steel post structure
Reinforced Stabipol roof
45 mm autoclaved wood fencing



Funding



Warranty



Installation



Technical assistance

The Comfort horse lunging ring is constructed using heavy materials typically used for agricultural buildings. Its IPE steel structure ensures durability and toughness under all conditions. Its Stabipol roof reduces noise due to bad weather and withstands the passage of time better than simple steel sheeting. The fence on the Comfort lunging ring consists of 45 mm thick class 4 treated autoclaved wood. This top quality wood is very popular with stable yards as it provides excellent resistance to impact and requires little maintenance. If you would like a plastic fence, the Prestige version lunging ring is made for you. Our suspended walker mechanisms go perfectly with this roof.

French design, manufactured in Normandy.

Technical characteristics

IPE galvanised

Stabipol reinforced polyester roofing

Wood beams 58 x 156 mm

External enclosure in class 4 45mm autoclaved wood

Choice of hinged or sliding access door

Prices

10m
12m
15m
16m
18m
20m

Options :

Extra-high walls 1.60m

Luxe (rounded walls)

Windbreak netting (straight) - height 1,25m

10m
12m
15m
16m
18m
20m

Wooden enclosure for suspended walkers

Windbreak netting Luxe (round) - height 1,25m

10m
12m
15m
16m
18m
20m



PRESTIGE LUNGING RING

PRESTIGE LUNGING RING

10 to 20 metres in diameter
IPE steel post structure
Reinforced Stabipol roof
PVC plastic fence



Funding



Warranty



Installation



Technical assistance

The Prestige version horse lunging ring is constructed using heavy materials typically used for agricultural buildings. Its IPE steel structure ensures durability and toughness under all conditions. Its Stabipol roof reduces noise due to bad weather and withstands the passage of time better than simple steel sheeting. The Prestige walker fence consists of PVC plastic planks mounted in a galvanised frame. The main advantage of plastic is that it needs no maintenance. Different colours are available, and some shades are like natural wood. Our suspended walker mechanisms go perfectly with this roof.

French design, manufactured in Normandy.

Technical characteristics

Galvanised steel structure

Stabipol reinforced polyester roofing

Wood beams 58 x 156mm

Windbreak netting

Sliding access door

Corridor enclosure Luxe with rounded frames

and high-resistant plastic paneling in dark wood colour

Prices


10m
12m
15m
16m
18m
20m

Options :

Extra-high walls 1.60m

Covered entrance

Enclosure for suspended walkers
(suspended walkers)

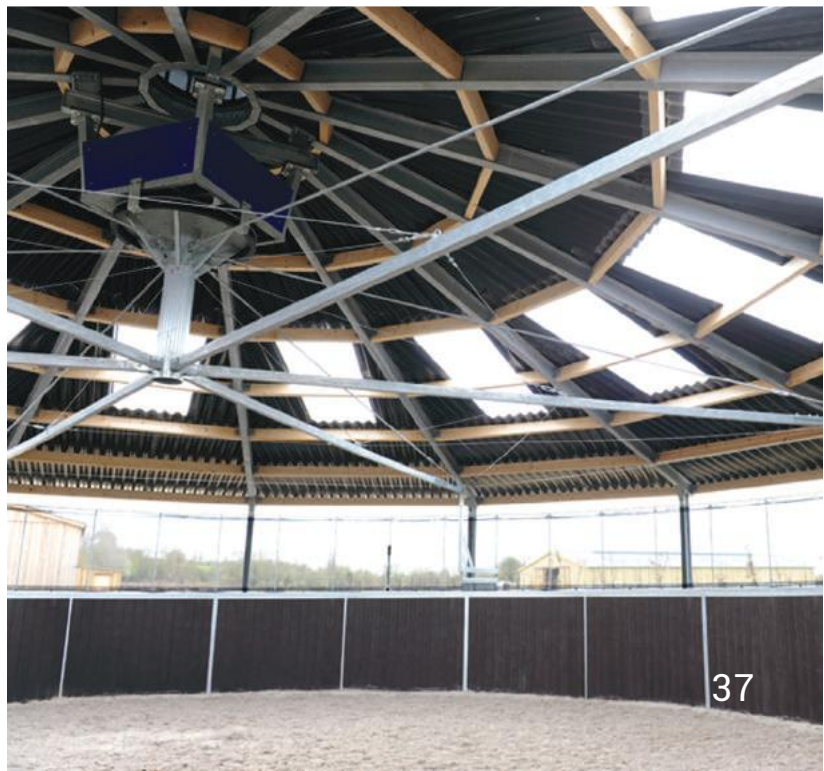

SUSPENDED HORSE WALKER



Funding



Warranty



Installation



Technical assistance

The suspended walker is at the very top of the range of horse walkers. It gives you a walker while keeping a working space at the centre of the structure. Available in 18 and 20 metres diameter, 6 to 8 horses can be worked simultaneously. Our suspended walker includes a set programme for automatically changing direction every 10 minutes. Capable of reaching a speed of 20 km/h, it offers the possibility of working at the walk and trot. The suspended horse walker mechanism can be installed on our basic, comfort and prestige lunging rings.

French design, manufactured in Normandy.

6 HORSES

18m

20m

8 HORSES

18m

20m

Options :

Lubrication system

Watering system

Partitions in choice (see page 11)

OPTIONS LUNGING RING

SIDE WALLS

Beo Band

Height 1500 mm - Depth : 14 and 20 mm

10m

12m

15m

16m

18m

20m



WALKER FLOORS

Butyflex

Big Bag 700 kg

10m

12m

15m

16m

18m

20m



HIPPOTRACK FLOORS

10m

12m

14m

15m

16m

18m

20m

22m



HORSE WEIGHING SCALES



HORSE WEIGHING SCALES

Maximum load 1500 kg
2 wheels for easy mobility

Digital screen

Battery operated (up to 100 hours)



Funding



Warranty



Installation



Technical assistance

The Hippoweight horse weighing scales are the perfect tool for checking and monitoring your horse's health. Typically used to determine the ideal fitness weight, it is also used in livery yards to confirm that your horses are receiving a correct feeding regime. Our weighing scales are easy to move on the two wheels located under the platform. They are equipped with a digital screen and a battery with a life of up to 100 hours.

French design, manufactured in Normandy.

Technical characteristics

Display with tactile screen, at the head of the horse

LCD screen with integrated background light

Structure in hot-dip epoxy coated steel

Rubber handle grip coating

220V power supply

Locking system for the weight

Integrated castors for an easier mobility

Prices

Hippoweight (120 kg)

Hippoweight Luxe (60 kg)

Dimensions

Weight : **120 kg**

Length : **2,01 m**

Width : **1,12 m**

Height : **0,11 m**

HORSE SOLARIUM



HORSE SOLARIUM

15 or 30 lamps
4 or 8 fans
220 V or 380 V supply



Funding



Warranty



Installation



Technical assistance

The Hippocenter horse solarium is designed to dry and/or warm up your horses with a dual effect. The lamps give off heat which is propelled by fans situated to the rear of the solarium. This diffuse heat reaches all parts of your horse, even the most distant. The average drying time is estimated as 23 minutes with our 15-lamp model and 18 minutes with the 30-lamp model. A token box can be installed on both models, to control use and obtain a return on the investment. French design, manufactured in Normandy.

French design, manufactured in Normandy.

Technical characteristics

	15 Lamps	30 Lamps
IR 150 watt	15	x
IR 250 watt	x	30
blowers	4	8
Power IR	2250 watt	7500 watt
Height	40 kg	80 kg
Length. x Width.	190 x 100	190 x 200
Voltage	240 V	380 V

Prices

Contact us

15 lamps
30 lamps



TRAINING

4 to 6 places
Galvanised steel frame
Delivered assembled or dismantled



Funding



Warranty



Installation



Technical assistance

Our horse trainer is designed to train 4 to 6 horses simultaneously on your track. You can set the pace and maintain fitness by cardio exercise. Our trainer is made from galvanised steel to withstand impacts caused by your horses.

French design, manufactured in Normandy.

Technical characteristics

Permit a single person to exercise up to 6 horses simultaneously
Saves time and limits human intervention
Optimal safety
Ideal to develop the endurance of your horses
Reversible tow bar for car or tractor
Rubber partitioning for maximum protection of the horse's legs

Prices

2-4 HORSES
no assembled
assembled

4-6 HORSES
no assembled
assembled

TRACK HARROW HIPPOTRACK



TRACK HARROW HIPPOTRACK

From 2 to 4 metres wide
Blade width adjustment
Blade depth adjustment



Funding



Warranty



Installation



Technical assistance

The Hippotrack track harrow is the most widely used for maintaining trotting tracks. It levels the track and lifts the sand, which continuously sinks, back up to the surface. In addition to the width adjustment, the blade height can also be adjusted for optimum results.

French design, manufactured in Normandy.

Technical characteristics

Length of blade : 2m / 3m / 4m

or customised

Hydraulic ram for blade adjustment

Depth-adjustable teeth and blade

Coated with hot-dipped epoxy paint

Prices

2m

3m

4m


Options :

Depth adjustment for 1 wheel

Depth adjustment for 2 wheel

Galvanisation

HORSE CRUSH

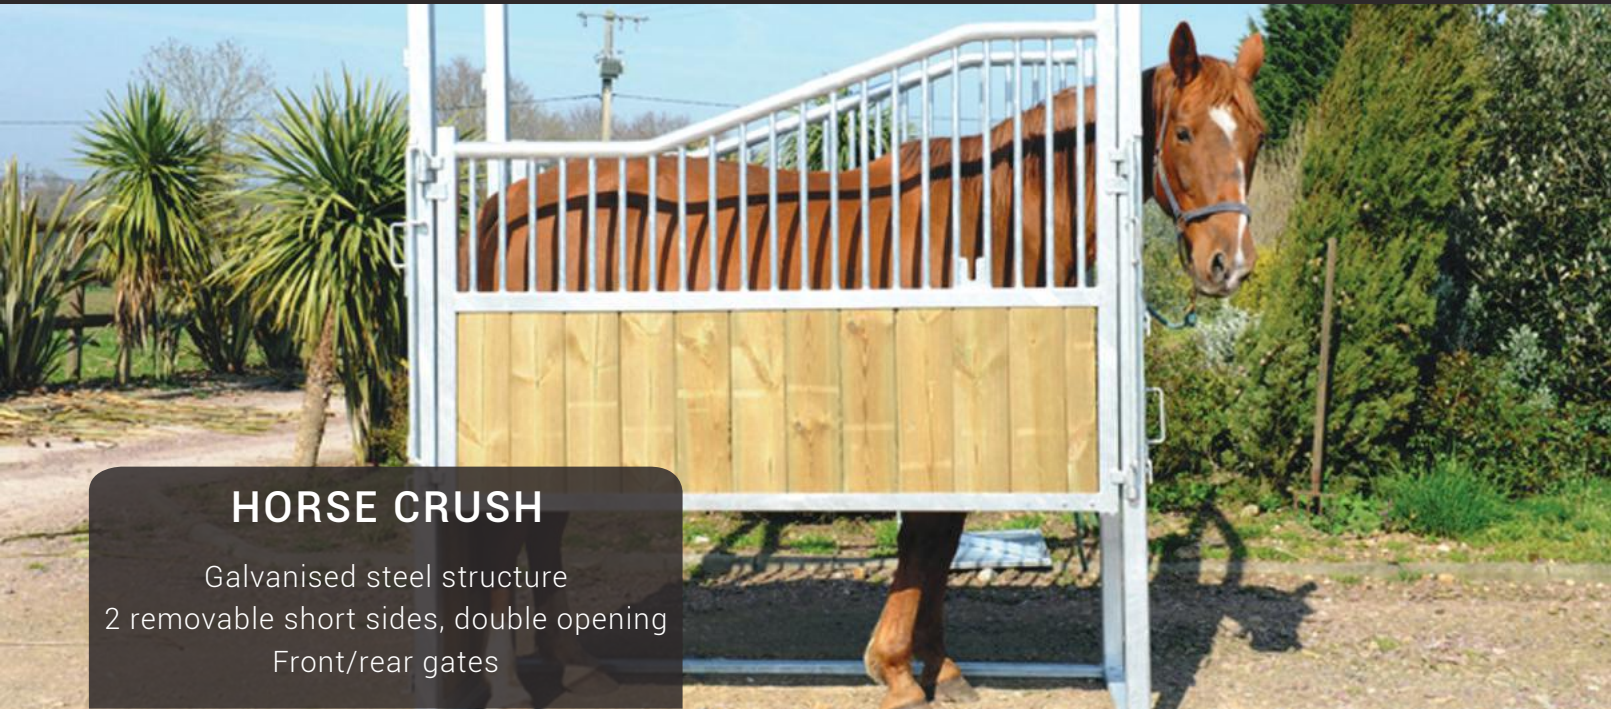

HORSE CRUSH

Galvanised steel structure
2 removable short sides, double opening
Front/rear gates



Funding



Warranty



Installation



Technical assistance

Our crush permits examinations while ensuring optimum safety for your horses and yourself. With 2 removable short sides and front and rear gates, our crush is fully modular. Structure entirely of galvanised steel, and short sides of class 4 treated autoclaved wood.

French design, manufactured in Normandy.

Technical characteristics

Galvanised steel structure
Up and down link, flat low side
2 low side removable double opening
Front/Back gate
Ultrasound shelf
Tail blocker

Prices

contact us

Dimensions

Length : **2 m**
Width : **0,92 m**
Height : **2,50 m**

FENCE HIPPOFENCE FOR Paddock, HORSEWALKER, LUNGE RING...

Pine poles
Polyethylene tape width 12 cm
Accessories and fixings included



Funding



Warranty



Installation



Technical assistance

The uncovered lunging ring Australia fence is very popular with stable yards aiming to invest in a strong and modular fence. The Australia panels can be moved easily by a single person and can be used to fence all types of structures (walker, lunging ring, Havrincourt arena, etc.). The steel used is 100% galvanised, offering very good corrosion resistance. This fencing complements the basic version lunging ring roof perfectly.

French design, manufactured in Normandy.

Technical characteristics

Log posts made of Scotch pine treated autoclave creosote class IV chamfered and appointments of diameter 12 or 14 cm

Sylvester pine wood is kiln dried and then impregnated

This wood is safe and requires no maintenance

12 cm wide polyethylene tape composed of three steel wires coated with polyethylene, color Brown

Accessories and fixings included

An electric wire K Securit in addition to the bands Hippofence to electrify the fences

PROVIDE EXCLUSIVE SERVICES TAILORED TO YOUR NEEDS...

Distribution

Hippocenter distributes new and second-hand products mainly manufactured in its factories



Maintening & Repairing

Committed to meeting the expectations of all stable yards, Hippocenter also specialises in maintaining and repairing all makes of equipment

Fast proposal

Detailed proposal sent within 48 h



Telephone Advice

Telephone advice 7/7


Restoring Products

Over the years we have acquired a wealth of experience in restoring products sold and installed by other companies



Quote

Free quote

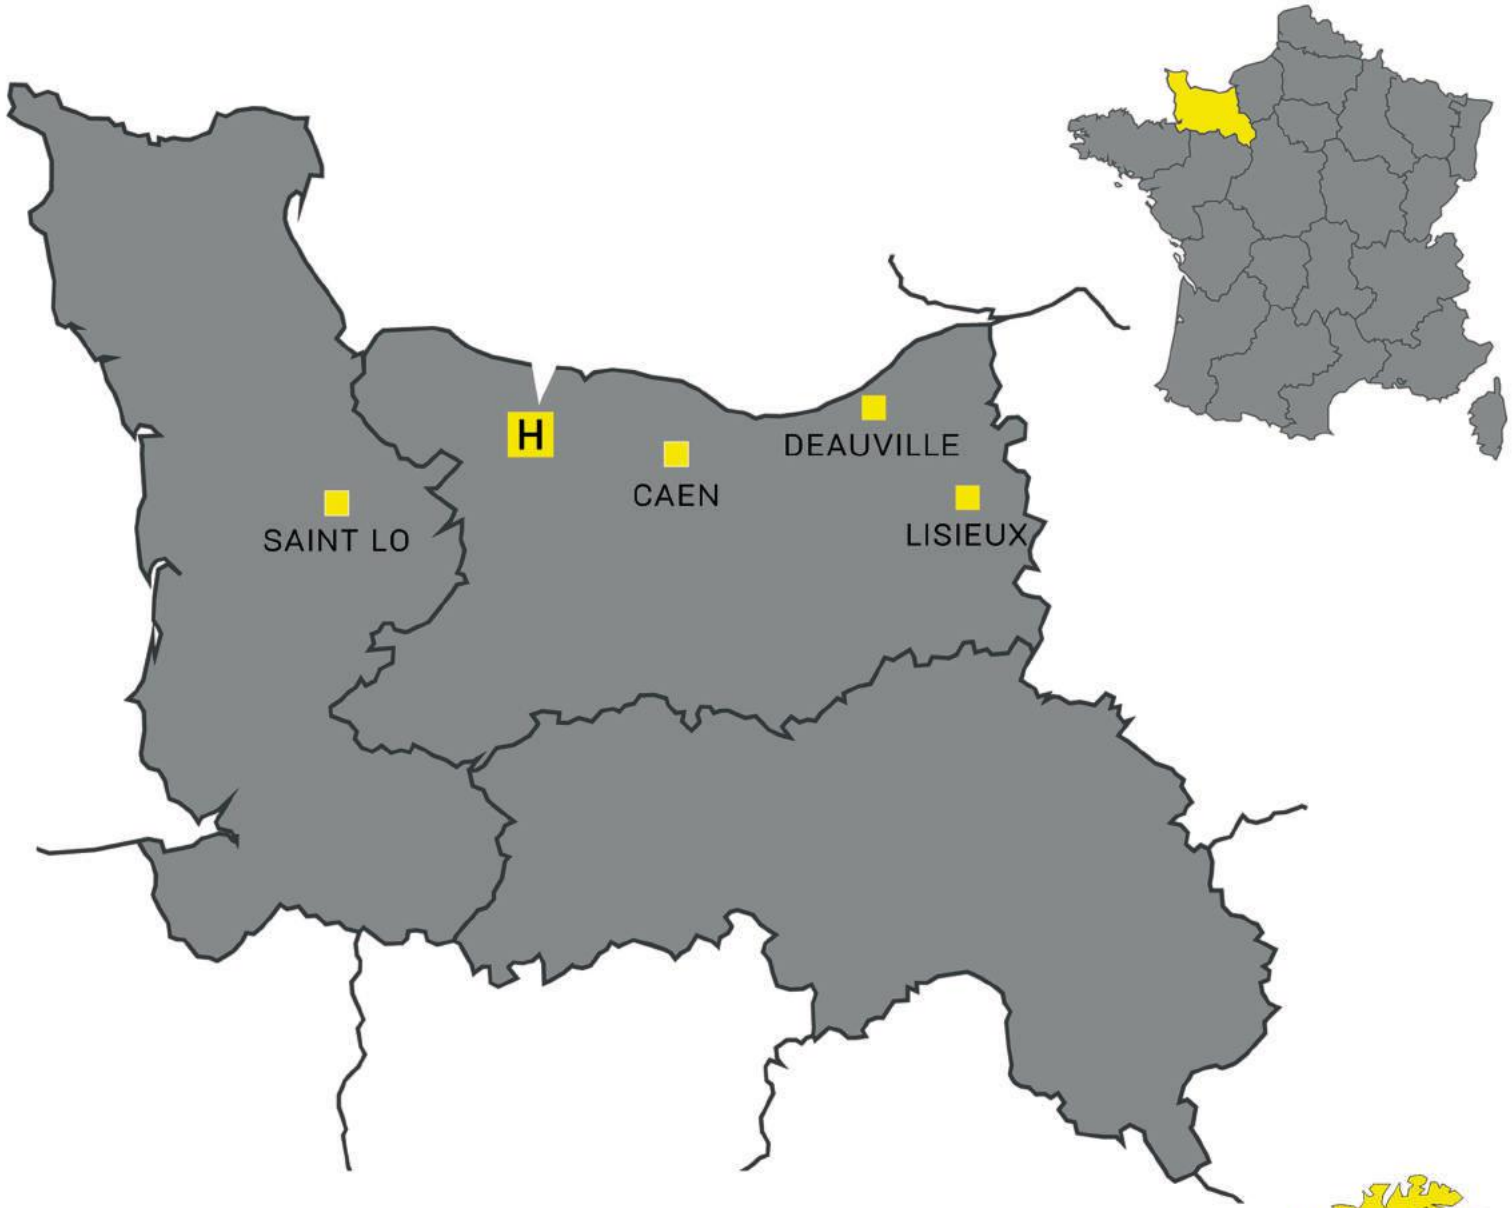

HIPPOCENTER

SINCE 2008

- H** CONCEPTION
- H** MANUFACTURE
- H** SALE





TREADMILL



WALKER



SEMI-COVERED WALKERS



COVERED LUNGE RINGS



WATER TREADMILL



HIPPOWEIGHT WEIGH SCALE



HORSE SOLARIUM



TRACK HARROW HIPPOTRACK



TRAINING

Contact us :

phone (0033) 6 50 05 97 15

mail : contact@hippocenter.fr

DEALER

Rue aux vaches - 14490 SAINT PAUL DU VERNAY - FRANCE

Office : 02 31 92 31 96 - Fax : 02 31 21 59 28

Join us on Facebook 

